
DROP 20 MINI
CON ALETTE
COD. CE1330DRA

EN Top range automatic drop down seal with 20mm maximum drop, sound insulation up to 50dB, which is easily fixed with screws on the lateral wings.

boxes of: 35 pieces



Lengths	330	430	≥530
Trimming	50	135	150


certification


File nr. R39141

application




plunger type

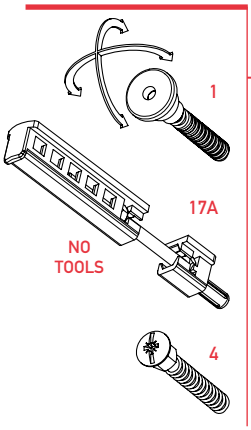

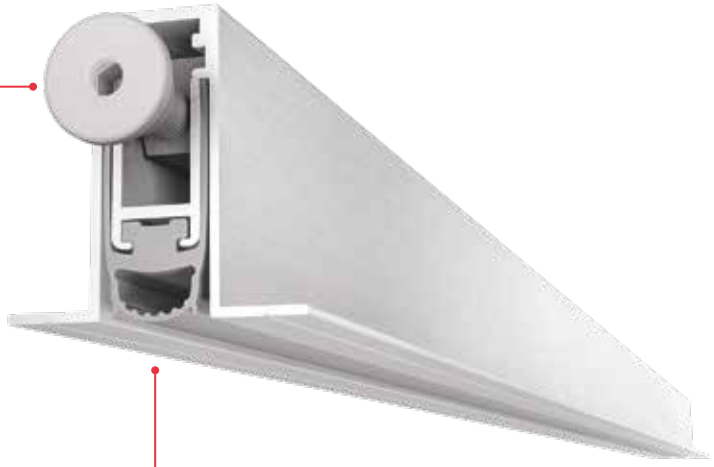


size 13x30 mm

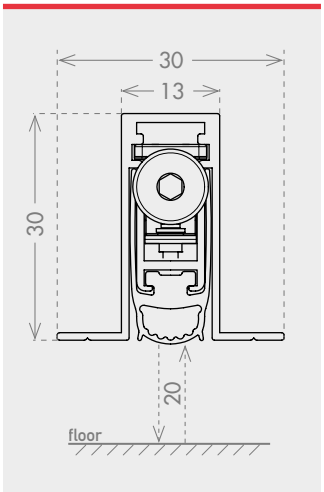

seals

HF2



50 dB Rw
IFT Cert. n. PB T17-K06-04-en-01


SIL

60 min.
APPLUS Cert. n. 20/22763-1241

UL 10C
File nr. R39141

fixing type

5F




closing plug included



optional

Z2



DOUBLE PLUNGER KIT
cod. CEACCSTD00003 p. 147

ACTUATOR PIVOT
cod. CEACCSTD00001 p. 148

IT Guarnizione automatica sottoporta di alta gamma con corsa fino a 20mm, abbattimento acustico fino a 50dB, che si fissa semplicemente con delle viti sulle alette laterali.

DE Automatische Top-Untertürdichtung mit Hub bis 20 mm, Schall-dämmung bis 50 dB, mit Schrauben einfach an den Seitenflügeln zu befes-tigen.

FR Plinthe automatique aux caractéristiques de haut niveau avec une course du joint de 20mm, une atténuation acous-tique de 50 dB et qui se fixe simplement avec des vis sur le profil Omega.

ES Burlete automático de alta gama con desplaza-miento de la junta hasta 20 mm y propriedad de aislamiento acústico hasta 50 dB, con fijacion mediante tornillos en las aletas laterales.

RU *Автоматически выпада-ющий уплотнитель высшего ценового сегмента с ходом до 20 мм, который обеспечива-ет снижение уровня шума до 50 дБ и просто крепится при помощи винтов на боковых фланцах.*